


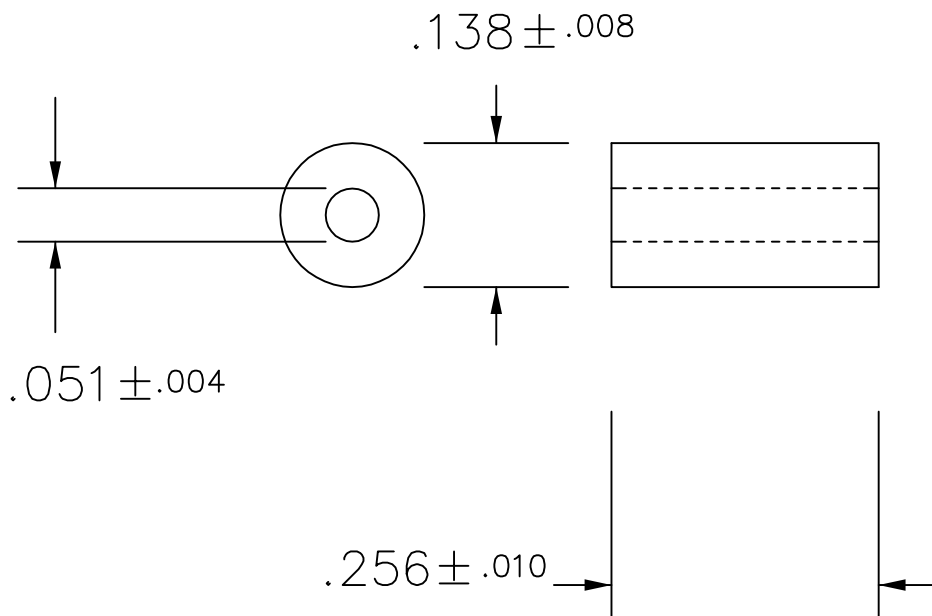

NOTE 1: Electrical Requirements:
 Test Condition 1: 100KHz, B=5G
 $u[\text{Ref.}] = 5000$
 $A = 6475 \text{ nH/N}^2 \pm 30\%$
 $\tan \delta / u = < 15 \times 10^{-6}$
 Test Condition 2: 10MHz, 1 Turn #20"
 $Z = 80 \text{ ohms} \pm 20\%$

				FERRONICS INCORPORATED	
B	Changed from Rp to Z.	KK 9-2-92			
A	Rp revised, see ECO	WLV 6-22-76			
REV.	CHANGE REVISIONS	APPVD.			
			CHK.	TITLE	BEAD
			REF.	DWG.	21-031-B
			DWN.	WLV 12-10-71	